

PC 5T & PC 8T


These units provide an excellent full range of clear sound reproduction. Used where a combination of high quality background music and public address is required. The loudspeakers are designed to be quickly and simply installed into false ceilings and are equipped with coaxial speakers for improved sound quality.

PC 5T




Technical Specifications	PC 5T
Rated power	10 W
Transformer power taps	10 W - 5 W - 2,5 W - 1,25 W
Sensitivity	88 dB (1 W/1 m)
Maximum SPL	98 dB (Pmax/1 m) at 15694 Hz
Frequency response	90 Hz – 20 kHz
Dispersion at 1000 Hz	120° conical
Driver dimensions	5" (130 mm) woofer, 0,5" (13 mm) tweeter, coaxial
Dimensions	ø 190 mm × 70 mm
Weight	1,1 kg
Material	Plastic, Steel grill
Colour	White (RAL 9016)

HORIZONTAL / VERTICAL POLAR DIAGRAMS

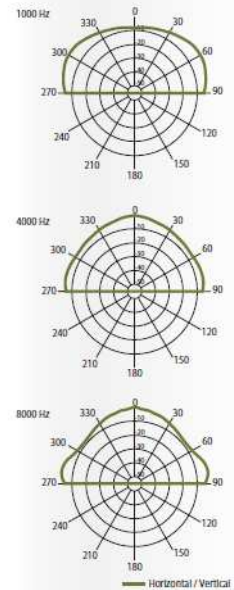

FREQUENCY RESPONSE

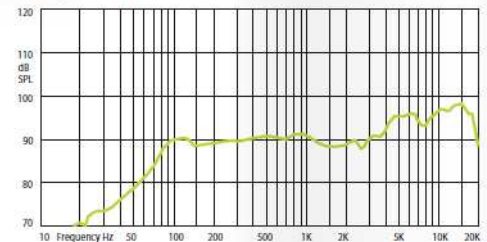

IMPEDANCE

