

CL-PROFILE LED INDUSTRIE

CL-PROFILE LED INDUSTRIE //

Le CL-PROFILE LED INDUSTRIE est le premier projecteur à cadrage et projection de silhouette à technologie LED dédié au monde de l'industrie.

Il permet le balisage des zones de danger par son installation sous les ponts de levage ou ponts roulants par exemple. Il permet également la projection de gobo type passage piéton, logo danger ou tout autre gobo sur mesure.

Le CL-PROFILE LED INDUSTRIE est le partenaire idéal pour votre sécurité !

The CL-PROFILE LED is the first framing and silhouette LED technology floodlight destined to the industry field.

It allows the marking of danger zones by installing under the lift bridges and cranes for example. It also allows the projection of a pedestrian crossing type gobo, danger logo or any other custom gobo.

The CL-PROFILE LED INDUSTRIE is the ideal partner for your safety !





CL-PROFILE LED 18/31°

CL-PROFILE LED INDUSTRIE AVANTAGES //

- SIMPLICITÉ | SIMPLICITY
- ÉFFICACITÉ | EFFICIENCY
- ROBUSTESSE | ROBUSTNESS
- DURÉE DE VIE ÉLEVÉE | HIGH LIFETIME
- ABSENCE DE MAINTENANCE | NO MAINTENANCE

CL-PROFILE LED INDUSTRIE //

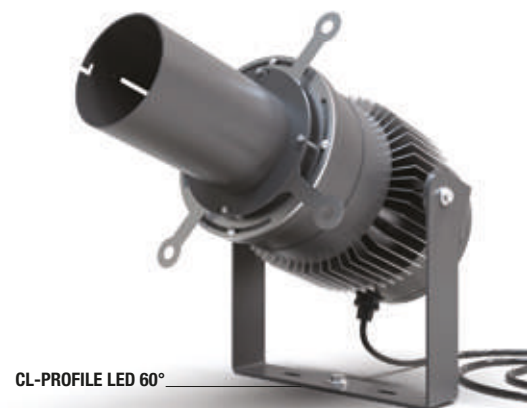

CL-PROFILE LED 60°



CL-PROFILE LED INDUSTRIE CARACTÉRISTIQUES //

Corps en aluminium thermolaqué RAL 2900 / Autre teinte RAL en option sur demande.

CL-PROFILE LED faisceau 18/31° ou 60°.

Source LED:

- LED CITIZEN BLEU 455Nm
L80B10

Refroidissement passif, température maximum ambiante +50°C | Alimentation électronique gradable DMX, DALI, 0/10V ou potentiomètre | Sécurité thermique | Adressage DMX par RDM.

SCx : 0,10m² (CL PROFILE 60°) | 0,12m² (CL PROFILE 18/31°)

Accessoires : Cache anti-poussière | Couteaux supplémentaires | Filtre coloré | Gobo standard ou sur-mesure.

Option : Précablage atelier (HO7RNF ou POWERDMX)

RAL 2900 thermolaquered aluminum body / Other RAL colors in option on demand
CL-PROFILE LED Beam angle 18/31° or 60° | CL-PROFILE LED RGBW Beam angle 18/31°

LED source :

- LED CITIZEN BLUE 455Nm
L80B10

Passive cooling, maximum temperature +50°C | Dimmable electronic power supply DMX | DALI | 0/10V or by potentiometer (only DMX for CL-PROFILE LED RGBW) | IP65 6 poles electrical rapid connector | Thermal safety | DMX addressing by RDM.

SCx : 0,10m² (CL-PROFILE LED 60°) | 0,12m² (CL-PROFILE LED 18/31°)

Accessories : Dust cover | Additional knives | Colored filters | Standard or bespoke gobo.


Option : In house wired (HO7RNF or POWERDMX)




CL-PROFILE LED INDUSTRIE

CL-PROFILE LED INDUSTRIE DIMENSIONS //

CL-PROFILE LED 18/31°



CL-PROFILE LED 60°



ILS NOUS FONT CONFIANCE //

